


# Curva 45°

Extremidades prolongadas para solda orbital x Tri-Clamp

DT-4.1.1-5 - (DT-13)



IMD BioClean

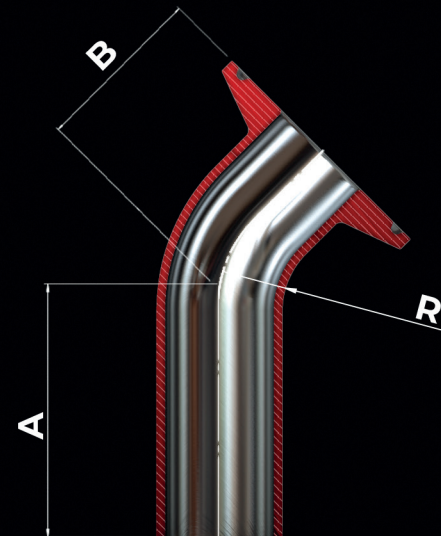

Ø (Diâmetro)	OD	ID	Esp.	A	B	R
1/4"	6,35	4,57	0,89	50,8	25,4	28,6
3/8"	9,53	7,75	0,89	50,8	25,4	28,6
1/2"	12,7	9,4	1,65	57,2	25,4	28,6
3/4"	19,05	15,75	1,65	57,2	25,4	28,6
1"	25,4	22,1	1,65	57,2	28,6	38,1
1.1/2"	38,1	34,8	1,65	62,5	36,5	57,2
2"	50,8	47,5	1,65	76,2	44,5	76,2
2.1/2"	63,5	60,2	1,65	85,7	52,4	95,3
3"	76,2	72,9	1,65	92,1	60,3	114,3
4"	101,6	97,38	2,11	114,3	79,4	152,4
6"	152,4	146,86	2,77	158,8	133,4	228,6

## Matéria Prima

ASTM A270 S2 UNS  
S31603 (316L)

## Acabamento de superfície

### Interno

SF1: Ra < 0,50 µm (20 µin)  
Polimento Mecânico

SF4: Ra < 0,375 µm (15 µin)  
Eletropolimento

### Externo

Ra 0,80 µm (32 µin)

Medidas em mm - Dimensões conforme norma ASME BPE (Tabela DT-3-1)

IMDI MEDIATO  
Inox

www.imediatovalvulas.com.br