
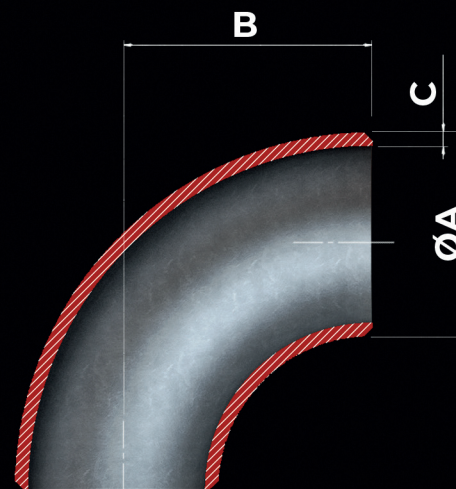


# Curva 90° Raio Longo

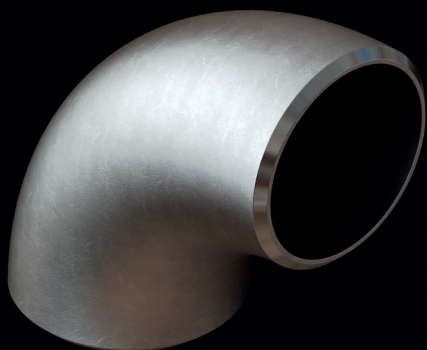

OD	A	B	C			
			SCH 5S.	SCH 10S.	SCH 40S.	SCH 80S.
1/2"	21,3	38,1	1,65	2,11	2,77	3,73
3/4"	29,7	38,1	1,65	2,11	2,87	3,91
1"	33,4	38,1	1,65	2,77	3,38	4,55
1.1/4"	42,2	47,8	1,65	2,77	3,56	4,85
1.1/2"	48,3	57,2	1,65	2,77	3,68	5,08
2"	60,3	76,2	1,65	2,77	3,91	5,54
2.1/2"	73,0	95,3	2,11	3,05	4,16	7,01
3"	88,9	114,3	2,11	3,05	5,49	7,62
4"	114,3	152,4	2,11	3,05	6,02	8,56
5"	141,3	190,5	2,77	3,40	6,55	9,53
6"	168,3	228,6	2,77	3,40	7,11	10,97
8"	219,1	304,8	2,77	3,76	8,18	12,7
10"	273,0	318,0	3,40	4,19	9,27	12,7
12"	323,9	457,0	3,96	4,57	9,53	12,7
14"	355,6	533,4	3,96	4,78	-	-
16"	406,4	609,6	4,20	4,78	-	-
18"	457,2	685,8	4,20	4,78	-	-
20"	508,0	762,0	4,78	5,54	-	-
22"	558,8	838,2	4,78	6,35	-	-
24"	609,6	914,4	5,54	63,5	-	-

## Matéria Prima

Aço Inoxidável ASTM A403  
WPS / WPW 304/L e 316/L

## Normas

SCH 5  
SCH 10  
SCH 40  
SCH 80  
SCH 160

Todas as medidas poderão sofrer alterações sem aviso prévio