


Ponta Roscada

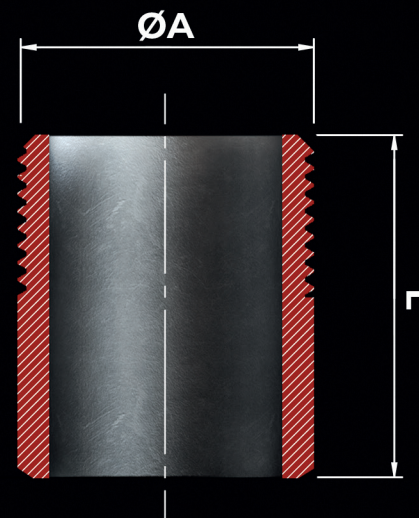

DN	ØA	L
1/8"	10,2	35,0
1/4"	13,5	35,0
3/8"	17,2	35,0
1/2"	21,3	40,0
3/4"	26,9	40,0
1"	33,7	40,0
1.1/4"	42,4	50,0
1.1/2"	48,3	50,0
2"	60,3	50,0
2.1/2"	76,1	50,0
3"	88,9	60,0
4"	114,3	60,0

Matéria Prima

ASTM A-312 TP 304/L e 316/L

Normas

SCH 40s

SCH 80s

SCH 160s

Todas as medidas poderão sofrer alterações sem aviso prévio